


RU600D-M30M-UPN8X2-H1141

Ultrasonic Sensor – Diffuse Mode Sensor

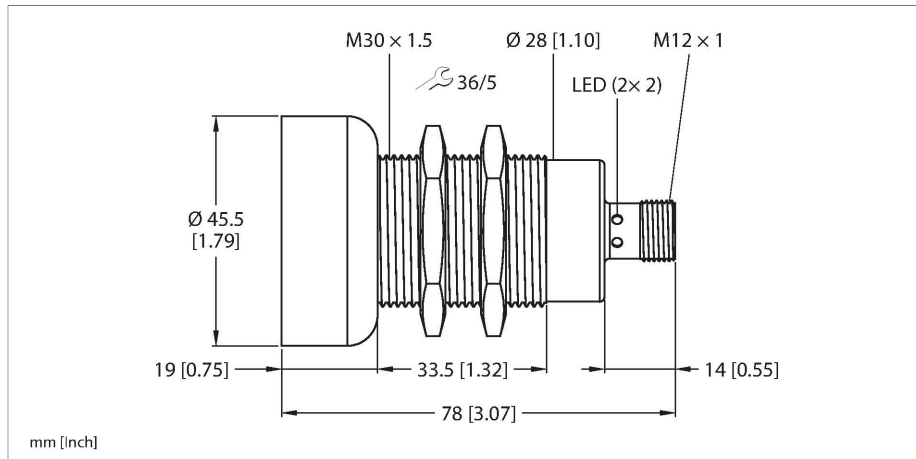



Technical data

Type	RU600D-M30M-UPN8X2-H1141
ID	100039014
Ultrasonic data	
Function	Proximity
Range	600...6000 mm
Resolution	1 mm
Minimum switching range	10 mm
Ultrasound frequency	80 kHz
Repeat accuracy	≤ 0.15 % of full scale
Temperature drift	± 1.5 % of full scale
Linearity error	≤ ± 0.5 %
Edge lengths of the nominal actuator	200 mm
Electrical data	
Operating voltage U_b	18...30 VDC
Residual ripple	10 % U_{ss}
DC rated operating current I_o	≤ 150 mA
No-load current	≤ 45 mA
Load resistance	≤ 1000 Ω
Residual current	≤ 0.1 mA
Readiness delay	≤ 300 ms
Communication protocol	IO-Link
Output function	NO/NC, PNP/NPN
Output 1	Switching output or IO-Link mode

Features

- Smooth sonic transducer face
- M30 cylindrical design, potted
- Connection via M12 × 1 male connector
- Measuring range adjustable via teach-in
- Temperature compensation
- Blind zone: 60 cm
- Range: 600 cm
- Resolution: 1 mm
- Adjustable switching hysteresis
- Aperture angle of sonic cone: ± 5 °
- Switching output, push-pull (PNP/NPN)
- NO/NC programmable
- IO-Link

Wiring diagram

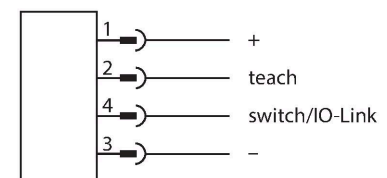

Functional principle

Ultrasonic sensors detect a multitude of objects contactlessly and wear free with

Technical data

Switching frequency	≤ 2 Hz
Hysteresis	≤ 5 mm
Voltage drop at I _o	≤ 2.5 V
Short-circuit protection	yes/Cyclic
Reverse polarity protection	yes
Wire breakage protection	yes
Setting option	Remote Teach IO-Link

IO-Link

IO-Link specification	V 1.1
IO-Link port type	Class A
Communication mode	COM 2 (38.4 kBaud)
Process data width	16 bit
Measured value information	15 bit
Switchpoint information	1 bit
Frame type	2.2
Minimum cycle time	2 ms
Function pin 4	IO-Link
Function Pin 2	DI
Maximum cable length	20 m
Profile support	Smart Sensor Profile

Mechanical data


Design	Threaded barrel, M30
Radiation direction	straight
Dimensions	Ø 45.5 x 78 mm
Housing material	Metal, CuZn, Nickel Plated
Max. tightening torque of housing nut	75 Nm
Transducer material	Plastic, Epoxyd resin and PU foam
Electrical connection	Connector, M12 × 1, 4-wire
Ambient temperature	-25...+70 °C
Storage temperature	-40...+80 °C
Pressure resistance	0.5...5 bar
Protection class	IP67
Power-on indication	LED, Green
Switching state	LED, Yellow
Object detected	LED, Yellow

Tests/approvals

MTTF	633 years acc. to SN 29500 (Ed. 99) 40 °C
------	---

ultrasonic waves. It does not matter whether the object is transparent or opaque, metallic or non-metallic, firm, liquid or powdery. Even environmental conditions such as spray, dust or rain hardly affect their function.

Sonic Cone

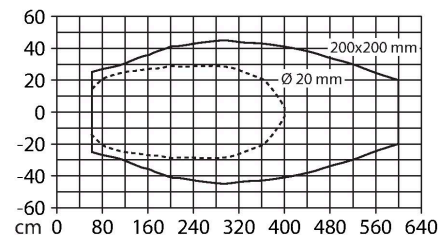


Technical data

Declaration of conformity EN ISO/IEC	EN 60947-5-2
Approvals	CE cULus


Mounting instructions

Mounting instructions/Description

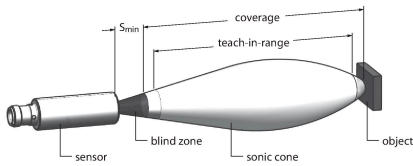

Accessories


MW30	6945005
------	---------




Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)

Accessories

Dimension drawing	Type	ID	
	TBEN-S2-4IOL	6814024	Compact multiprotocol I/O module, 4 IO-Link Master 1.1 Class A, 4 universal PNP digital channels 0.5 A



Dimension drawing	Type	ID	
	USB-2-IOL-0002	6825482	IO-Link Master with integrated USB port

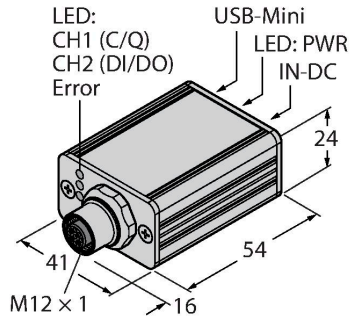

VB2-SP1

A3501-29

Teach adapter

